

LINEBACKER® SERIES CABLE PROTECTORS

- Checkers' most robust cable protection option
- High load bearing capacity for heavy duty equipment
- Ideal for: Oil, Gas, Mining, Military, Construction, Any Heavy Duty Application




5-CHANNEL HEAVY DUTY LINEBACKER®


5-CHANNEL HEAVY DUTY LINEBACKER® CABLE PROTECTOR with hinged lid provides a safer crossing for vehicles and pedestrian traffic while protecting valuable electrical cables and hose lines from damage in extreme weather conditions and work environments. Modular interlocking design is ideal for use in oil and gas applications, mining, military, and other industrial environments with heavy trucks and forklifts.

MODEL: CP5X125-YO

- UV-stabilized polyurethane material
- Protects cables and hoses up to 1.35 in. outside dia.
- Patented T-Connectors to extend to any length
- Patented 5-bar tread surface for maximum traction
- Reinforced hinged lid for easy cable placement
- Easy to transport, setup, disassemble and store

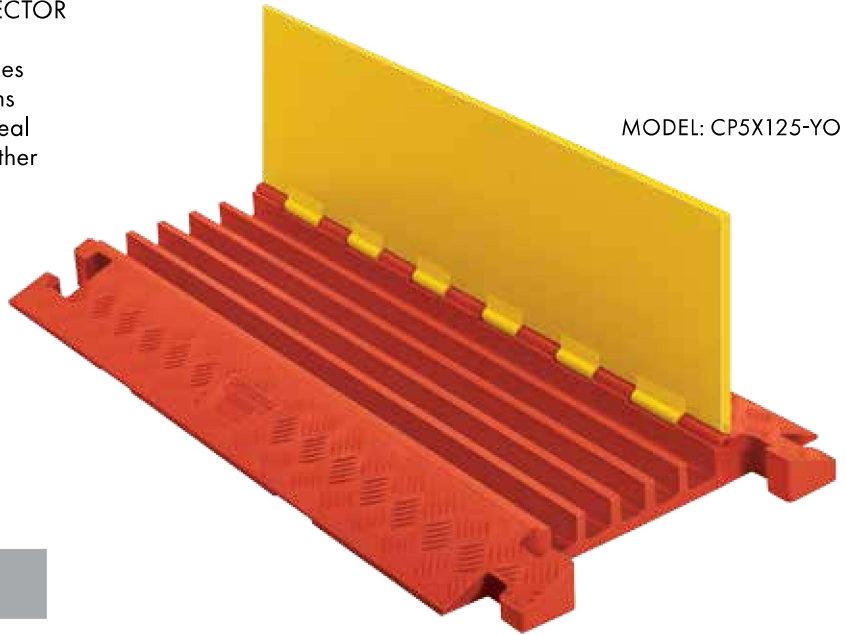


ACCESSORIES



45° LEFT TURN
MODEL: CPT5X125-L-YO




45° RIGHT TURN
MODEL: CPT5X125-R-YO




END CAPS (PAIR ONLY)
MODEL: CPEC5X125-O



SPECIFICATIONS

LOAD CAPACITY <small>Max load tested at 70°F (21°C)</small>	20,150 lb./Tire (9,140 kg) 40,300 lb./Axle (18,280 kg)
CHANNELS	5
MAXIMUM OD	1.35 in.
CONNECTORS	T-Shaped
COLOR OPTIONS	YO 

Reference page 3 for color option codes.




Model	Description	Length	Width	Height	Channel Width	Maximum OD	Weight
CP5X125-YO	5-CH LB Heavy Duty	36 in. (91.4 cm)	20 in. (50.8 cm)	2.31 in. (5.72 cm)	1.35 in. (3.43 cm)	1.35 in. (3.43 cm)	25 lb. (11.3 kg)
CPT5X125-L-YO	45° Left Turn	25 in. (63.5 cm)	20 in. (50.8 cm)	2.31 in. (5.72 cm)	1.35 in. (3.43 cm)	1.35 in. (3.43 cm)	13 lb. (5.9 kg)
CPT5X125-R-YO	45° Right Turn	25 in. (63.5 cm)	20 in. (50.8 cm)	2.31 in. (5.72 cm)	1.35 in. (3.43 cm)	1.35 in. (3.43 cm)	13 lb. (5.9 kg)
CPEC5X125-O	End Caps (Pair Only)	F: 7.5 in. (19 cm) M: 5.25 in. (13.3 cm)	20 in. (50.8 cm) 20 in. (50.8 cm)	2.31 in. (5.72 cm) 2.31 in. (5.72 cm)	1.35 in. (3.43 cm) 1.35 in. (3.43 cm)	1.35 in. (3.43 cm) 1.35 in. (3.43 cm)	3.5 lb. (1.6 kg) 3.5 lb. (1.6 kg)

4-CHANNEL HEAVY DUTY LINEBACKER®


4-CHANNEL HEAVY DUTY LINEBACKER® CABLE PROTECTOR with hinged lid provides a safer crossing for vehicles and pedestrian traffic while protecting valuable electrical cables and hose lines from damage in extreme weather conditions and work environments. Modular interlocking design is ideal for use in oil and gas applications, mining, military, and other industrial environments with heavy trucks and forklifts.

- Protects cables and hoses up to 1.35 in. outside dia.
- Patented T-Connectors to extend to any length
- Reinforced hinged lid for easy cable placement
- All-weather polyurethane construction
- Patented 5-bar tread surface for maximum traction
- Easy to transport, setup, disassemble and store

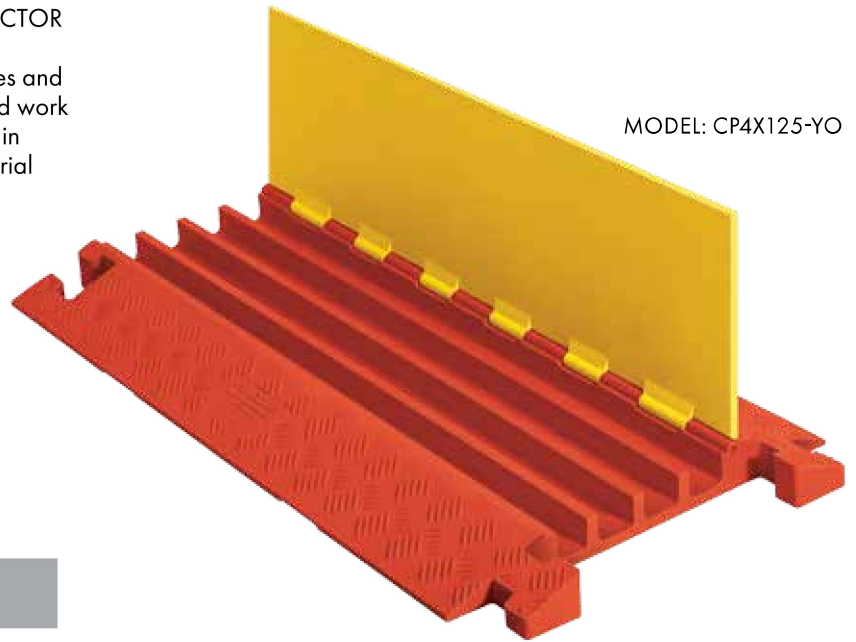


MODEL: CP4X125-YO


ACCESSORIES



45° LEFT TURN
MODEL: CPT4X125-L-YO




45° RIGHT TURN
MODEL: CPT4X125-R-YO




END CAPS (PAIR ONLY)
MODEL: CPEC4X125-O



SPECIFICATIONS

LOAD CAPACITY <small>Max load tested at 70°F (21°C)</small>	20,150 lb./Tire (9,140 kg) 40,300 lb./Axle (18,280 kg)
CHANNELS	4
MAXIMUM OD	1.35 in.
CONNECTORS	T-Shaped
COLOR OPTIONS	YO 

Reference page 3 for color option codes.

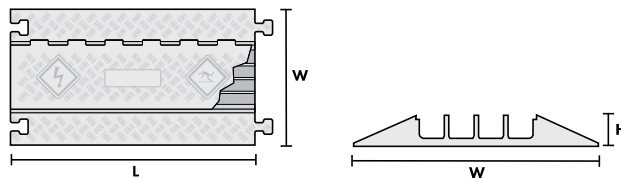


* NOTE: One of the channels is 1.54 in. wide (3.92 cm)

Model	Description	Length	Width	Height	Channel Width	Maximum OD	Weight
CP4X125-YO	4-CH LB Heavy Duty	36 in. (91.4 cm)	20 in. (50.8 cm)	2.31 in. (5.72 cm)	1.85 in. (4.71 cm)	1.35 in. (3.43 cm)	26 lb. (11.8 kg)
CPT4X125-L-YO	45° Left Turn	25 in. (63.5 cm)	20 in. (50.8 cm)	2.31 in. (5.72 cm)	1.85 in. (4.71 cm)	1.35 in. (3.43 cm)	13 lb. (5.9 kg)
CPT4X125-R-YO	45° Right Turn	25 in. (63.5 cm)	20 in. (50.8 cm)	2.31 in. (5.72 cm)	1.85 in. (4.71 cm)	1.35 in. (3.43 cm)	13 lb. (5.9 kg)
CPEC4X125-O	End Caps (Pair Only)	F: 7.5 in. (19 cm) M: 5.25 in. (13.3 cm)	20 in. (50.8 cm) 20 in. (50.8 cm)	2.31 in. (5.72 cm) 2.31 in. (5.72 cm)	1.85 in. (4.71 cm) 1.85 in. (4.71 cm)	1.35 in. (3.43 cm) 1.35 in. (3.43 cm)	3.5 lb. (1.6 kg) 3.5 lb. (1.6 kg)


3-CHANNEL HEAVY DUTY LINEBACKER®

3-CHANNEL HEAVY DUTY LINEBACKER® CABLE PROTECTOR with hinged lid provides a safer crossing for vehicles and pedestrian traffic while protecting valuable electrical cables and hose lines from damage in extreme weather conditions and work environments. Modular interlocking design is ideal for use in oil and gas applications, mining, military, and other industrial environments with heavy trucks and forklifts.

- Protects cables and hoses up to 2.25 in. outside dia.
- Patented T-Connectors to extend to any length
- Reinforced hinged lid for easy cable placement
- All-weather polyurethane construction
- Patented 5-bar tread surface for maximum traction
- Easy to transport, setup, disassemble and store

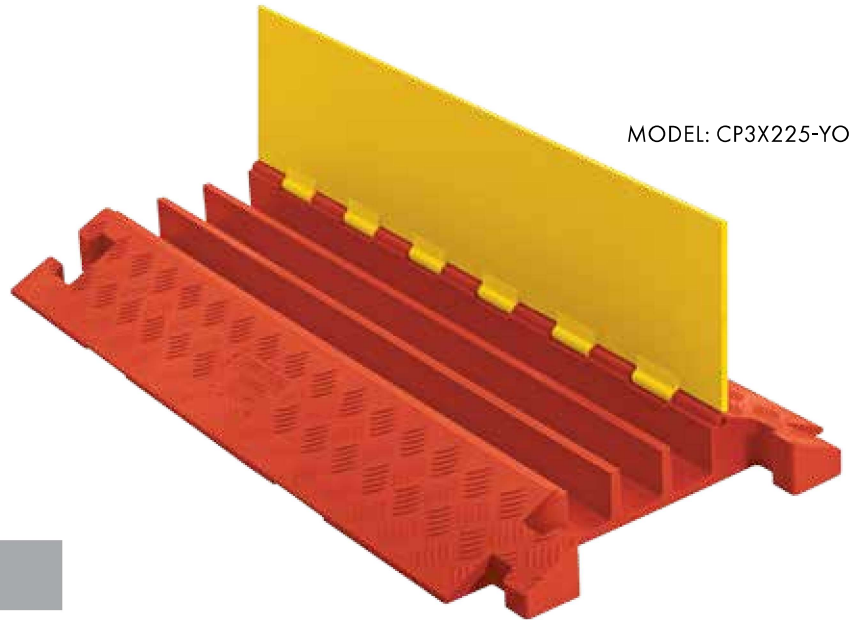


ACCESSORIES



45° LEFT TURN
MODEL: CPT3X225-L-YO




45° RIGHT TURN
MODEL: CPT3X225-R-YO





END CAPS (PAIR ONLY)
MODEL: CPEC3X225-O



SPECIFICATIONS

LOAD CAPACITY <small>Max load tested at 70°F (21°C)</small>	14,210 lb./Tire (6,446 kg) 28,420 lb./Axle (12,892 kg)
CHANNELS	3
MAXIMUM OD	2.25 in.
CONNECTORS	T-Shaped
COLOR OPTIONS	YO 

Reference page 3 for color option codes.




Model	Description	Length	Width	Height	Channel Width	Maximum OD	Weight
CP3X225-YO	3-CH LB HD	36 in. (91.4 cm)	20 in. (50.8 cm)	3.05 in. (7.75 cm)	2.25 in. (5.72 cm)	2.25 in. (5.72 cm)	28 lb. (12.7 kg)
CPT3X225-L-YO	45° Left Turn	25 in. (63.5 cm)	20 in. (50.8 cm)	3.05 in. (7.75 cm)	2.25 in. (5.72 cm)	2.25 in. (5.72 cm)	15 lb. (6.8 kg)
CPT3X225-R-YO	45° Right Turn	25 in. (63.5 cm)	20 in. (50.8 cm)	3.05 in. (7.75 cm)	2.25 in. (5.72 cm)	2.25 in. (5.72 cm)	15 lb. (6.8 kg)
CPEC3X225-O	End Caps (Pair Only)	F: 8.25 in. (20.96 cm) M: 6 in. (15.24 cm)	20 in. (50.8 cm) 20 in. (50.8 cm)	3.05 in. (7.75 cm) 3.05 in. (7.75 cm)	2.25 in. (5.72 cm) 2.25 in. (5.72 cm)	2.25 in. (5.72 cm) 2.25 in. (5.72 cm)	4 lb. (1.8 kg) 4 lb. (1.8 kg)

2-CHANNEL HEAVY DUTY LINEBACKER®

2-CHANNEL HEAVY DUTY LINEBACKER® CABLE PROTECTOR with hinged lid is one of the largest open top cable protectors on the market. This wide channel design provides a safer crossing for vehicles and pedestrian traffic while protecting valuable electrical cables and hose lines from damage in extreme weather conditions and work environments. Modular interlocking design is ideal for use in oil and gas applications, mining, military, and other industrial environments with heavy trucks and forklifts.

- Protects cables and hoses up to 3.25 in. outside dia.
- Patented T-Connectors to extend to any length
- Reinforced hinged lid for easy cable placement
- All-weather polyurethane construction
- Patented 5-bar tread surface for maximum traction
- Easy to transport, setup, disassemble and store

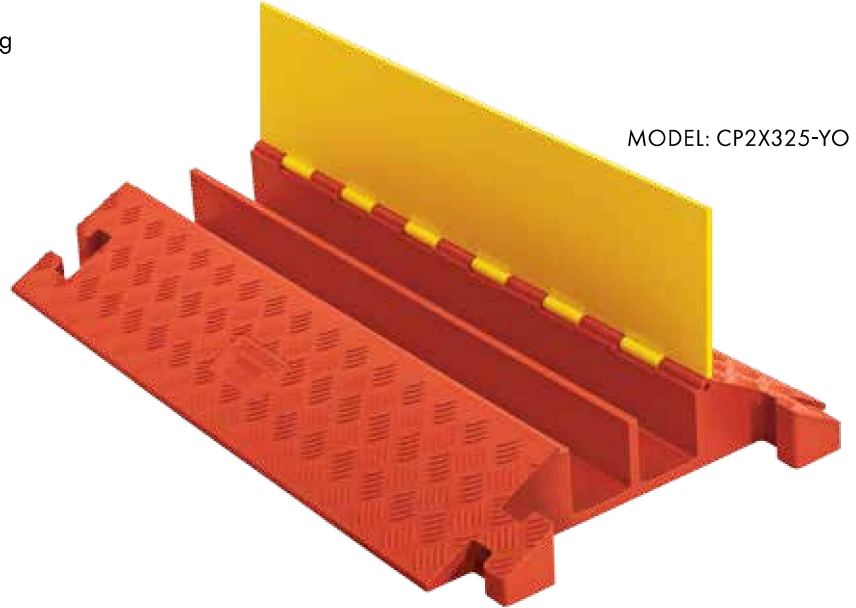


MODEL: CP2X325-YO





Linebacker® in use at a drilling rig



SPECIFICATIONS

LOAD CAPACITY <small>Max load tested at 70°F (21°C)</small>	10,880 lb./Tire (4,935 kg) 21,760 lb./Axle (9,870 kg)
CHANNELS	2
MAXIMUM OD	3.25 in.
CONNECTORS	T-Shaped
COLOR OPTIONS	YO 

Reference page 3 for color option codes.



Model	Description	Length	Width	Height	Channel Width	Maximum OD	Weight
CP2X325-YO	2-CH Heavy Duty LB	36 in. (91.4 cm)	22 in. (55.88 cm)	4.13 in. (10.16 cm)	3.25 in. (8.26 cm)	3.25 in. (8.26 cm)	33 lb. (15.0 kg)